



www.HRdiemen.es



E4821
E4821B (EI48/20,5)
 (12VA-ta 40°C/B)
 (10VA-ta 70°C/B)
 peso/ weight - 330/340 gr.




Según normas/ According EN61558, EN60590, EN60472, UL506, UL1585 • Protección externa/ External protection

SECUNDARIO SIMPLE

Potencia/Power 12 VA		Modelo HR		Clase term. B(130°C/266°F)	Protec. P. 230V:80mA/T 115V:160mA/T
Prim. 230V	Prim. 115V	Prim. 230V	Prim. 115V		
E4821014	E4821114	E4821514	E4821614	4,5 V	2667 mA
E4821000	E4821100	E4821500	E4821600	6 V	2000 mA
E4821002	E4821102	E4821502	E4821602	7,5 V	1600 mA
E4821004	E4821104	E4821504	E4821604	9 V	1333 mA
E4821006	E4821106	E4821506	E4821606	12 V	1000 mA
E4821008	E4821108	E4821508	E4821608	15 V	800 mA
E4821010	E4821110	E4821510	E4821610	18 V	667 mA
E4821012	E4821112	E4821512	E4821612	24 V	500 mA

Potencia/Power 10 VA		Modelo HR		Clase term. B(130°C/266°F)	Protec. P. 230V:63mA/T 115V:125mA/T
Prim. 230V	Prim. 115V	Prim. 230V	Prim. 115V		
E4821064	E4821164	E4821564	E4821664	4,5 V	2222 mA
E4821050	E4821150	E4821550	E4821650	6 V	1667 mA
E4821052	E4821152	E4821552	E4821652	7,5 V	1333 mA
E4821054	E4821154	E4821554	E4821654	9 V	1111 mA
E4821056	E4821156	E4821556	E4821656	12 V	833 mA
E4821058	E4821158	E4821558	E4821658	15 V	667 mA
E4821060	E4821160	E4821560	E4821660	18 V	556 mA
E4821062	E4821162	E4821562	E4821662	24 V	417 mA

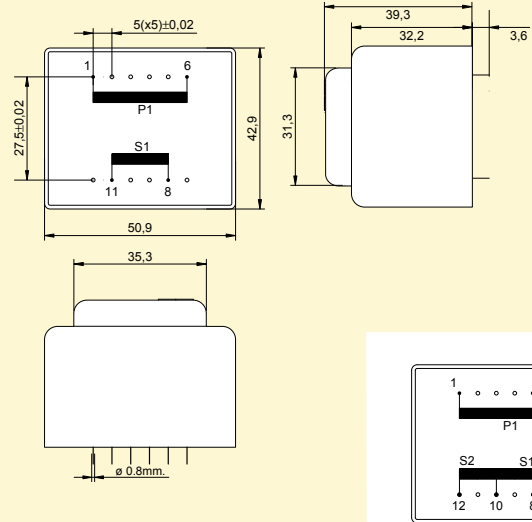


SECUNDARIO DOBLE

Potencia/Power 12 VA		Modelo HR		Clase term. B(130°C/266°F)	Protec. P. 230V:80mA/T 115V:160mA/T
Prim. 230V	Prim. 115V	Prim. 230V	Prim. 115V		
E4821015	E4821115	E4821515	E4821615	2x4,5 V	2x1333 mA
E4821001	E4821101	E4821501	E4821601	2x6 V	2x1000 mA
E4821003	E4821103	E4821503	E4821603	2x7,5 V	2x800 mA
E4821005	E4821105	E4821505	E4821605	2x9 V	2x667 mA
E4821007	E4821107	E4821507	E4821607	2x12 V	2x500 mA
E4821009	E4821109	E4821509	E4821609	2x15 V	2x400 mA
E4821011	E4821111	E4821511	E4821611	2x18 V	2x333 mA
E4821013	E4821113	E4821513	E4821613	2x24 V	2x250 mA

Potencia/Power 10 VA		Modelo HR		Clase term. B(130°C/266°F)	Protec. P. 230V:63mA/T 115V:125mA/T
Prim. 230V	Prim. 115V	Prim. 230V	Prim. 115V		
E4821065	E4821165	E4821565	E4821665	2x4,5 V	2x1111 mA
E4821051	E4821151	E4821551	E4821651	2x6 V	2x833 mA
E4821053	E4821153	E4821553	E4821653	2x7,5 V	2x667 mA
E4821055	E4821155	E4821555	E4821655	2x9 V	2x556 mA
E4821057	E4821157	E4821557	E4821657	2x12 V	2x417 mA
E4821059	E4821159	E4821559	E4821659	2x15 V	2x333 mA
E4821061	E4821161	E4821561	E4821661	2x18 V	2x278 mA
E4821063	E4821163	E4821563	E4821663	2x24 V	2x208 mA

SECUNDARIO TOMA MEDIA / CENTER TAPPED


Potencia/Power 12 VA		Modelo HR		Clase term. B(130°C/266°F)	Protec. P. 230V:80mA/T 115V:160mA/T
Prim. 230V	Prim. 115V	Prim. 230V	Prim. 115V		
E4821035	E4821135	E4821535	E4821635	2x4,5 V	2x1333 mA
E4821021	E4821121	E4821521	E4821621	2x6 V	2x1000 mA
E4821023	E4821123	E4821523	E4821623	2x7,5 V	2x800 mA
E4821025	E4821125	E4821525	E4821625	2x9 V	2x667 mA
E4821027	E4821127	E4821527	E4821627	2x12 V	2x500 mA
E4821029	E4821129	E4821529	E4821629	2x15 V	2x400 mA
E4821031	E4821131	E4821531	E4821631	2x18 V	2x333 mA
E4821033	E4821133	E4821533	E4821633	2x24 V	2x250 mA

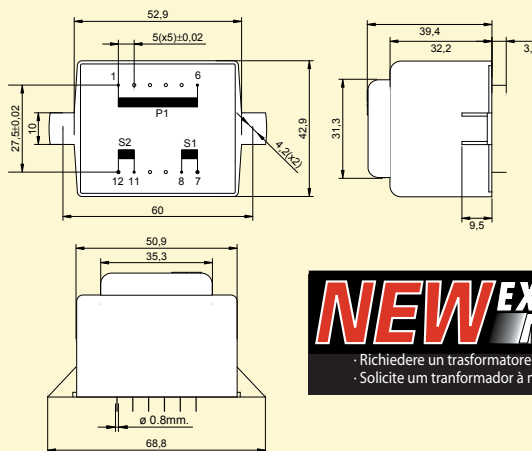

NEW EXPRESS MODEL
 · Richiedere un trasformatore su misura
 · Solicite um transformador à medida

Fusibles de protección - Primario (T) temporizado - Secundario (F) rápido
 Protection fuses - Primary (T) Time-lag - Secondary (F) fast

Conexión serie/ Doble tensión
 Serial connection/ Double voltage

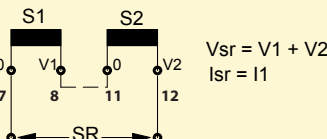

Conexión paralelo/ Doble corriente
 Parallel connection/ Double current

